

CRUISE Marine Refrigerators

Customised refrigerators: from ready to be mounted to complete tailor-made solutions



isotherm

Extremely robust yet practical in the use

Isotherm Cruise Refrigerators combine technological innovation with sophisticated, yet practical design. Available from 36 liters up to 271 liters, they provide numerous customisation options:

- Custom door panel: door panel can be selected according to customer needs on most of the models
- Different side frames: 2 up to 3 side frames for an easy installation and 3 up to 4 side frames for a complete flush integration
- Complete stainless steel design (doors and handles)
- Different cooling systems: ventilated as standard, water-cooled with a self pumping kit (patented) and water-cooled through a sea water pump for tropical conditions as option
- Universal AC/DC kit optional: allows sufficient power supply all over the world
- ASU or Isotherm SMART ENERGY CONTROL systems: options for reduced power consumption on most models

Some standard features of the CRUISE line include:

- Freezer compartment (except Drink versions)
- One piece inner lining, high density plastic with rounded corners for easy cleaning
- Corrosion-resistant materials
- Interior light (not on CR 36, CR 42, CR 100)
- Magnetic rubber seals keep moisture out and door firmly closed
- Right or left hand side opening possible
- Fan-cooled 12/24 V Danfoss / Secop compressor

Technical specifications

Type	Volume (l)	Dimensions H x W x D (mm)	Available with ASU	Available with SEC	Weight (kg)	Power consumption (W / 24 hours)	Danfoss / Secop compressor type	Freezer -6 °C / 21 °F volume in l
CR 36	36	250 x 440 x 715 ¹			15	300	BD35F	-
CR 36 INOX	36	255 x 453 x 715			16	300	BD35F	-
CR 40 CUBIC	40	430 x 420 x 590 ²			18	186	BD35F	40 (-12°C)
CR 42	42	520 x 380 x 480 ²		X	16	275	BD35F	4 (-6°C)
CR 42 INOX	42	520 x 400 x 515		X	17	275	BD35F	4 (-6°C)
CR 49 CLASSIC	49	523 x 386 x 450 ²	X	X	17	280	BD35F	4 (-6°C)
CR 49 INOX	49	520 x 400 x 510	X	X	18	280	BD35F	4 (-6°C)
CR 65 CLASSIC	65	527 x 455 x 480 ²	X	X	18	290	BD35F	4 (-6°C)
CR 65 INOX	65	527 x 470 x 545	X	X	19	290	BD35F	4 (-6°C)
CR 85 CLASSIC	85	620 x 477 x 505 ²	X	X	23	380	BD35F	6 (-6°C)
CR 85 INOX	85	620 x 495 x 555	X	X	24	380	BD35F	6 (-6°C)
CR 90	70/20	845 x 478 x 430 ²			24	520	BD35F	20 (-18°C)
CR 100	100	746 x 487 x 455 ²	X	X	26	400	BD35F	5 (-6°C)
CR 130 CLASSIC	130	746 x 527 x 505 ²	X	X	27	440	BD35F	6 (-6°C)
CR 130 DRINK	130	746 x 527 x 520 ²			27	400	BD35F	-
CR 130 INOX	130	743 x 545 x 545	X	X	28	440	BD35F	6 (-6°C)
CR 130 D INOX	130	743 x 545 x 560			28	400	BD35F	-
CR 165	125/40	1210 x 500 x 530 ³			45	600	BD50F	40 (-18°C)
CR 195*	130/65	1345 x 550 x 580			60	840	2 x BD35F	65 (-18°C)
CR 195 INOX	130/65	1345 x 545 x 580			63	840	2 x BD35F	65 (-18°C)
CR 200*	150/50	880 x 730 x 620			50	800	BD50F	50 (-12°C)
CR 200 INOX	150/50	868 x 730 x 620			53	800	BD50F	50 (-12°C)
CR 219	178/41	1406 x 550 x 530 ³			47	650	BD50F	41 (-18°C)
CR 271	218/53	1660 x 550 x 530 ³			52	700	BD50F	53 (-18°C)

(1) Door thickness (to be added): 35 mm

(2) Door thickness (to be added): 40 mm

(3) Door's depth + gasket (in regard to the refrigerator's cabinet) on double-door refrigerators is 68 mm

* For CR195 and CR200 Classic are valid the basic drawing specifications as per INOX version

Power consumption W/24 h in operation on 12 Volt with +5°C in the refrigeration space, ambient temperature +25°C according to the Standards ISO 15502:2005 and EN 153:2006

Refrigerators manufacturing tolerances -2/+4 mm

Dimensions include refrigerator's feet

With AC/DC optional kit, depth may increase


According to EN 603335 - 1 regulation, the inside walls of the furniture housing the refrigerator must be distant from the fridge by 20 mm per side and 50 mm from the top

Please refer to the installation manual for further technical/installation details


Most of Isotherm fridges can also benefit from a retrofitted Isotherm Smart Energy Control kit. On some models it reduces battery consumption by up to 50 %

Specification changes may be made without prior notice

Cruise Marine Refrigerators Classic

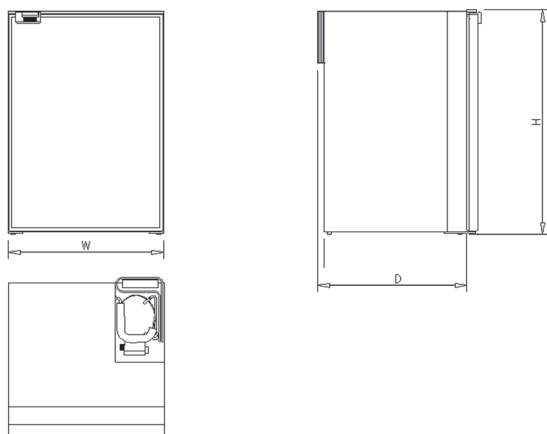

Cruise Marine Refrigerators Inox

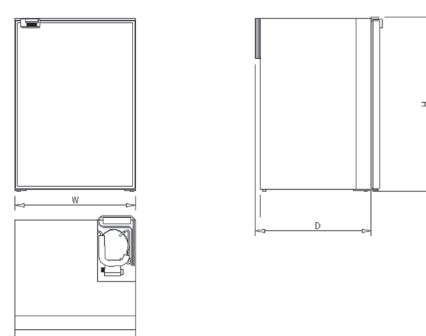

Indel Webasto Marine
47866 S. Agata Feltria (RN)
Italy

Phone: +39 0541 848030
E-Mail: info@indelwebastomarine.com

www.indelwebastomarine.com
www.webasto.com